BDLF16-00/X.Y.Z



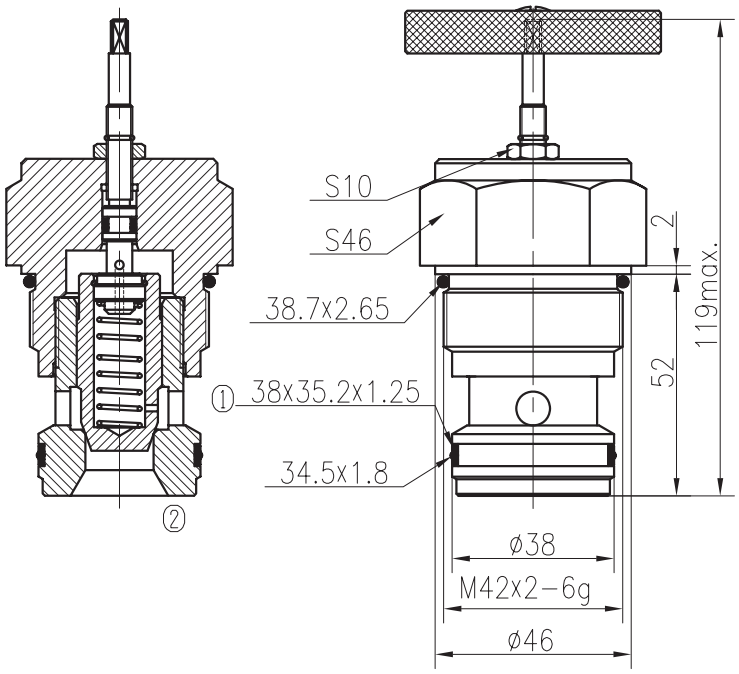

Specifications:

Max.Working Pressure :	240bar
Flow Max):	350L/min at 10bar
Internal Leakage :	⩽0.3ml/min
Filtraion Of Oil :	25μm or better
Temperature :	-30~+110℃ (Standard Buna Seals)
Cavity :	T8-S2
Installation torque :	88.4~102Nm

The valve reduce its office value from fully opened to fully close with clock-wise adjustment rotation. At the same time ,the flow from max. to shut-off.

Reverse flow from ①to② is free and no restriction.

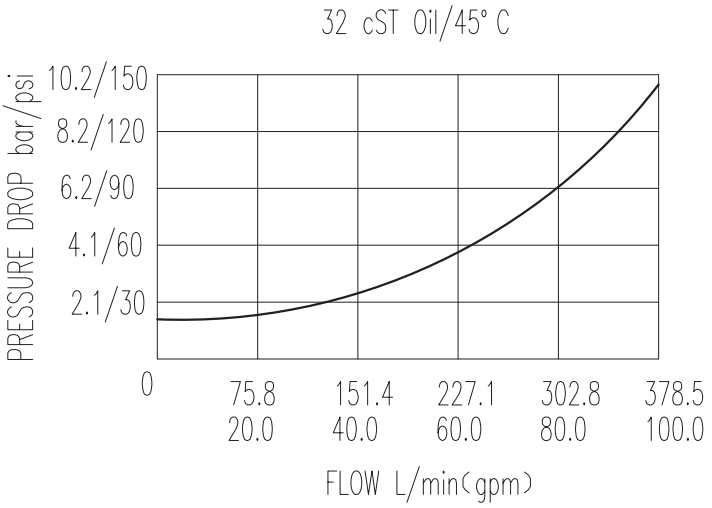

X	PORTING	Y	SEALS
0	Cartridge Only	N	Buna
		V	Fluor.

Z	ADJUSTMENTS	
05	Outside Square and Locking Nut	
10	Steel Knob and Locking Nut